

Locking carabiners / Connecteurs à verrouillage

CE 0082

EN 362
EN 12275

EAC TP TC
019/2011

NFPA

individually tested

PRICE / PRIX

WARNING / ATTENTION

Activities involving the use of this equipment are inherently dangerous. You are responsible for your own actions and decisions.

- Before using this equipment, you must:
- Read and understand all Instructions for Use.
 - Get specific training in its proper use.
 - Become acquainted with its capabilities and limitations.
 - Understand and accept the risks involved.





Les activités impliquant l'utilisation de cet équipement sont par nature dangereuses. Vous êtes responsable de vos actes, de vos décisions et de votre sécurité.

- Avant d'utiliser cet équipement, vous devez :
- Lire et comprendre toutes les instructions d'utilisation.
 - Vous former spécifiquement à l'utilisation de cet équipement.
 - Vous familiariser avec votre équipement, apprendre à connaître ses performances et ses limites.
 - Comprendre et accepter les risques induits.



Traceability and markings / Traçabilité et marquage



PETZL.COM



Warning symbols
Panneaux d'alertes



PETZL
F-38920 Croles
Cidex 105A
PETZL.COM
ISO 9001
© Petzl




Sustaining our Community
Au service de la Communauté
FONDATION-PETZL.ORG



1. Field of application (text part)
Champ d'application (partie texte)

2. Nomenclature
Nomenclature





3. Inspection, points to verify
Contrôle, points à vérifier



4. Compatibility (text part)
Compatibilité (partie texte)

5. Carabiner positioning
Positionnement du connecteur

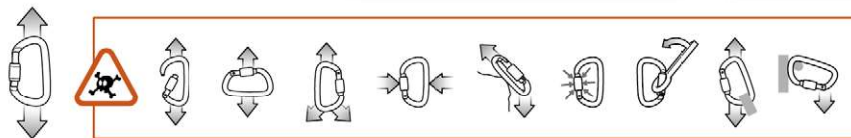

NFPA CERTIFICATION

CARABINER AND SNAP LINK USER INFORMATION. THESE CONNECTORS MEETS THE CARABINER REQUIREMENTS OF NFPA 1983, STANDARD ON LIFE SAFETY ROPE AND EQUIPMENT FOR EMERGENCY SERVICES, 2017 EDITION. EMERGENCY SERVICES CARABINER IN ACCORDANCE WITH NFPA 1983-2017

CERTIFICATION NFPA

INFORMATION AUX UTILISATEURS POUR LES CONNECTEURS. CES CONNECTEURS SONT CONFORMES AUX EXIGENCES DE LA NORME NFPA 1983, STANDARD ON LIFE SAFETY ROPE AND EQUIPMENT FOR EMERGENCY SERVICES, EDITION 2017. EMERGENCY SERVICES CARABINER IN ACCORDANCE WITH NFPA 1983-2017



T (TECHNICAL USE) MEETS NFPA 1983 (2017 ED.)


WILLIAM TL - MBS 27 kN
WILLIAM BL - MBS 27 kN
WILLIAM SL - MBS 27 kN

Am'D TL - MBS 27 kN
Am'D BL - MBS 27 kN
Am'D SL - MBS 27 kN
Am'D RL - MBS 27 kN

After removing the Instructions for Use from the equipment, make a copy of it and keep the original as part of a permanent record that includes the usage and inspection history for the equipment. Keep the copy of the Instructions for Use with the equipment and refer to it before and after each use. Additional information regarding auxiliary equipment can be found in NFPA 1500 and NFPA 1983.

Après avoir détaché la notice du produit, faites en une copie et gardez l'original dans un dossier qui compile l'historique de vie du produit et les vérifications EPI réalisées. Gardez une version de la notice avec le produit et consultez-la avant et après chaque utilisation. Des informations complémentaires sont disponibles dans les normes : NFPA 1500 et NFPA 1983.

6. Opening/closing
Ouverture / Fermeture

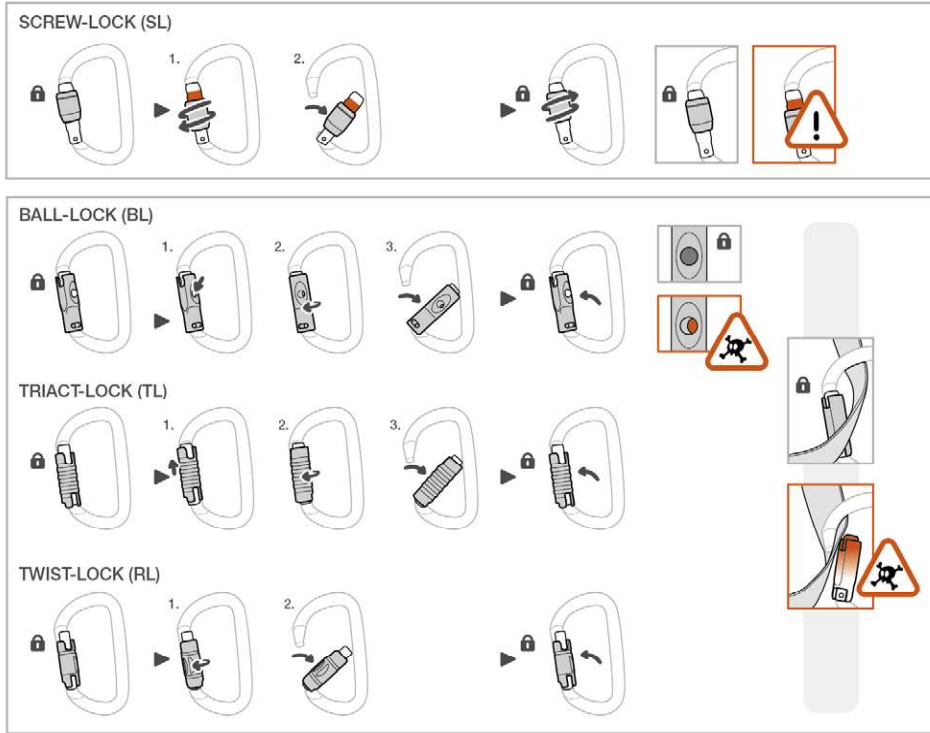


7. Additional information
Informations complémentaires

A. Lifetime / Durée de vie



unlimited
illimitée

B. Acceptable T°
T° tolérées




+ 80°C / + 176°F
- 40°C / - 40°F

C. Precautions for use / Précautions d'usage



D. Cleaning / Nettoyage



+ 30°C maxi.
+ 86°F maxi.

E. Drying / Séchage



+ 30°C maxi.
+ 86°F maxi.



F. Storage - Transport
Stockage - transport



G. Maintenance
Entretien



H. Modifications - Repairs
Modifications - Réparations



→ Petzl

I. FAQ - Contact
Questions - Contact



→ petzl.com



Standards / Normes

WILLIAM	SL	27 kN	8 kN	8 kN	28 mm	85 g	EN 362: 2004 B	EN 12275: 2013 B/H	UIAA	ERAC ^{TPTC019/2011}
	BL	27 kN	8 kN	8 kN	27 mm	90 g				
	TL	27 kN	8 kN	8 kN	27 mm	90 g				
Am'D	SL	27 kN	8 kN	7 kN	25 mm	70 g	EN 362: 2004 B	EN 12275: 2013 B	UIAA	ERAC ^{TPTC019/2011}
	BL	27 kN	8 kN	7 kN	25 mm	75 g				
	TL	27 kN	8 kN	7 kN	24 mm	75 g				
	RL	27 kN	8 kN	7 kN	25 mm	75 g				
OK	SL	25 kN	8 kN	7 kN	22 mm	70 g	EN 362: 2004 B	EN 12275: 2013 B	UIAA	ERAC ^{TPTC019/2011}
	BL	25 kN	8 kN	7 kN	23 mm	75 g				
	TL	25 kN	8 kN	7 kN	22 mm	75 g				
Sm'D	SL	23 kN	8 kN	7 kN	20 mm	45 g	EN 362: 2004 B	EN 12275: 2013 B	UIAA	ERAC ^{TPTC019/2011}
	TL	23 kN	8 kN	7 kN	19 mm	55 g				
	RL	23 kN	8 kN	7 kN	20 mm	50 g				
ATTACHE	SL	22 kN	7 kN	6 kN	24 mm	56 g	EN 362: 2004 B	EN 12275: 2013 H	UIAA	ERAC ^{TPTC019/2011}
SPIRIT	SL	23 kN	8 kN	9 kN	19 mm	45 g	EN 362: 2004 B	EN 12275: 2013 B	UIAA	ERAC ^{TPTC019/2011}

